
2 SIDEWALL 'A' EXTERIOR ELEVATION SCALE: 1/8" = 1'-0"




3 SIDEMALL 'B' EXTERIOR ELEVATION 1 SCALE: 1/8" = 1'-0"

ADD SGL. KNEE BRACES PER DETAILS A/2 AT THIS ENDWALL TO PEAK TO EAVE

ENDWALL 'A' INTERIOR ELEVATION

CORNER COLUMN

SCALE: 1/8" = 1'-0"



ENDWALL 'B' INTERIOR ELEVATION

IMPORTANT: IN ADDITION TO THESE PLANS (WHICH ALWAYS TAKE PRECEDENCE), YOU SHOULD HAVE THE FOLLOWING FROM ACT BUILDING SYSTEMS:

- CONSTRUCTION PACKAGE
- INSTALLATION MANUALS - CONSTRUCTION VIDEOS

PLEASE CONTACT YOUR SALES REP IF YOU HAVE NOT RECEIVED THESE PRIOR TO STARTING CONSTRUCTION.

PROJECT DESIGN CRITERIA

WIND DESIGN OF LATERAL FORCE-RESISTING SYSTEMS IS BASED ON THE DIRECTIONAL DESIGN PROCEDURE OF ASCE 7-16, CHAPTER


SEISMIC DESIGN OF LATERAL FORCE-RESISTING SYSTEMS ARE AS FOLLOWS.

— TRANSVERSE, ORDINARY STEEL MOMENT FRAME (SEISMIC DESIGN IS BASED ON ASCE 07-16, SECTIONS 12.1 - 12.18)

— LONGITUDINAL: ORDINARY STEEL BRACED FRAME, (SEISMIC DESIGN IS PERFORMED USING THE SIMPLIFIED DESIGN PROCEDURE (ASCE 07-16, SECTION 12.14).

DESIGN BASE SHEAR: IS SHOWN ON CALCULATION SHEET M2

COMPONENT DIAGRAM




DEFLECTION LIMITS

PURLINS: L/150 (STD) GIRTS: L/90 (STD) EM WIND COLUMNS: L/120 (STD)

MALL PANEL

ROOF DIAPHRAGM NOTE

SCALE: 1/8" = 1'-0"

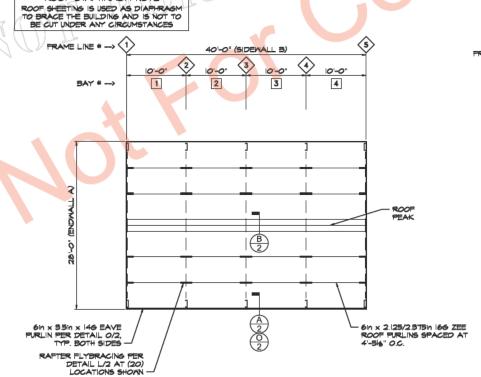

6 ROOF FRAMING PLAN

1 SCALE: 1/8" = 1'-0"

FRAME LINE # --> (1) 40'-0" (SIDENALL B) 1 2 3 4 BAY # --> X-BRACING 4 X-BRACING

NOTE: DESIGN OF CONCRETE FOUNDATION TO SUPPORT BUILDING SHOWN IS TO BE PROVIDED BY

L/60 (STD)

SHOWN IS TO BE PROVIDED BY OTHERS. BRAND, TYPE, AND EMBEDMENT OF ANCHORAGE OF BUILDING COMPONENTS TO CONCRETE REFER TO COLUMN BASE DETAILS FOR ANCHOR LOCATIONS AND DIAMETER

NOTE: SEE "TYP. FRAME CROSS-SECTION" DETAIL ON SHEET 2 FOR SPECIFIC FRAME DETAIL INFORMATION.

BUILDING LAYOUT PLAN

SCALE: 1/8" = 1'-0"

DING ® S M CTBUILI S Y S T E

 \triangleleft

CONSTRUCTION

Buildings Avenue NW s, MI 49504 Buildings 801 Broadway A Grand Rapids, Steel Steel

Toro oro JOB

10/29/2024

VNUJ98563015